INSTALLATION INSTRUCTIONS
SELF-CONTAINED REFRIGERATED DROP-IN COLD PAN
MODEL RCP-7600

ELECTRICAL

MODEL	VOLTS	WATTS	HP	AMPS	PHASE	FIELD WIRING GAUGE	TEMP. RATING
RCP-7600	115	805	1/4	7.0	SINGLE	14 AWB Cu	75°C

INCHES
(MM)

CUTOUT DETAILS

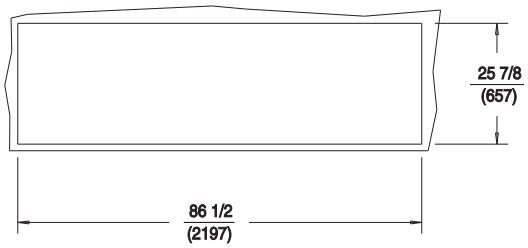

PRODUCT DIMENSIONS

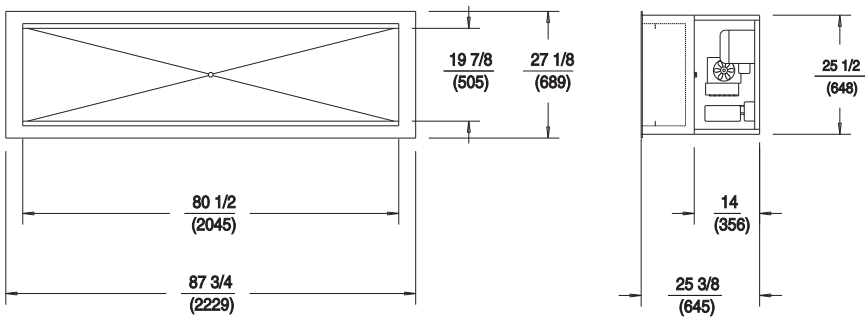

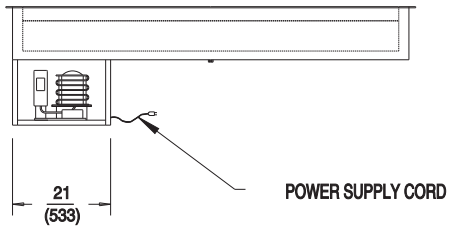

CLEARANCES

THERE ARE NO CLEARANCE SPECIFICATIONS FOR THIS UNIT.

INSTALLATION INSTRUCTIONS

INSTALLER MUST MEET CONDITIONS OF ACCEPTABILITY OUTLINED BELOW UPON INSTALLATION:

1. This unit may be installed in stainless steel, wood, Formica, or Corian tables and countertops.
2. This unit is shipped completely assembled and requires only a 15 AMP grounded outlet and drain connection. Power cord and ON/OFF switch should be accessible after installation of the unit.
3. When installing the unit it is essential to provide front and rear openings in the cabinet to allow for proper air circulation. Louvered grills with a minimum size of 200 sq. inches each may be placed over each opening.

TO INSTALL:
1. Lay out "cutout" dimensions on countertop or table.
2. Cut out hole and add stiffeners to support weight of unit if necessary. Countertop must be flat and level before installing cold pan.
3. Apply a generous bead of silicone sealant to underside of mounting flange before setting unit into cutout. Remove any excess sealant from top flange and countertop.
4. Connect 1 inch drain to drain pan or floor drain. Consult local codes for approved drain connections.

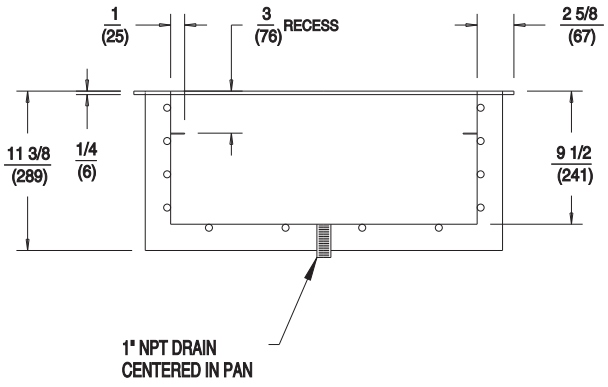

CROSS-SECTION OF COLD PAN